

PUMY+ecodan

Air-to-Air and Air-to-Water Hybrid Multi Split System

1 Unit, 2 Roles – Total Comfort Year-round

Air Conditioning and Hot Water Supply Matching the Needs of Each Room


All-in-one outdoor unit (air conditioning, domestic hot water supply and hot water heating)

PUMY for Air-to-Air


PUMY utilises various indoor units, enabling the air conditioning or heating of multiple rooms, and controls each unit individually.

ecodan for Air-to-Water


- ✓Domestic hot water (DHW) supply
- ✓Heating for multiple rooms

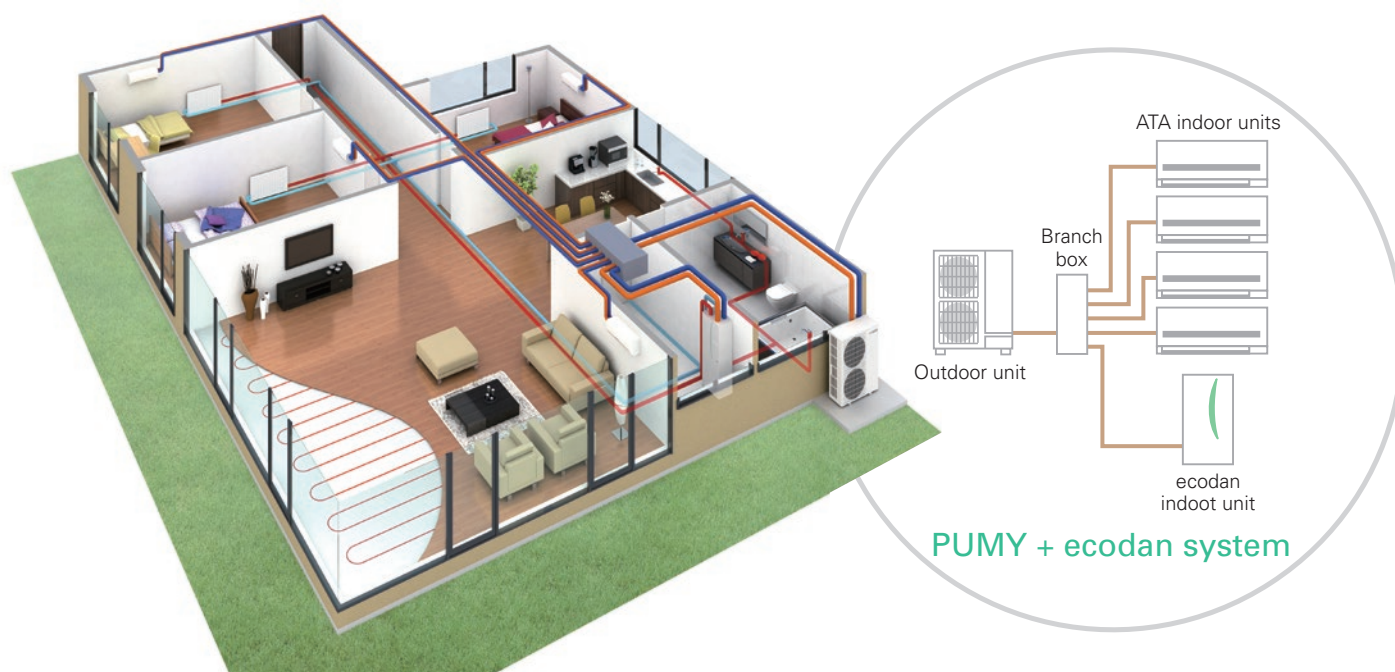

Main Operation Patterns

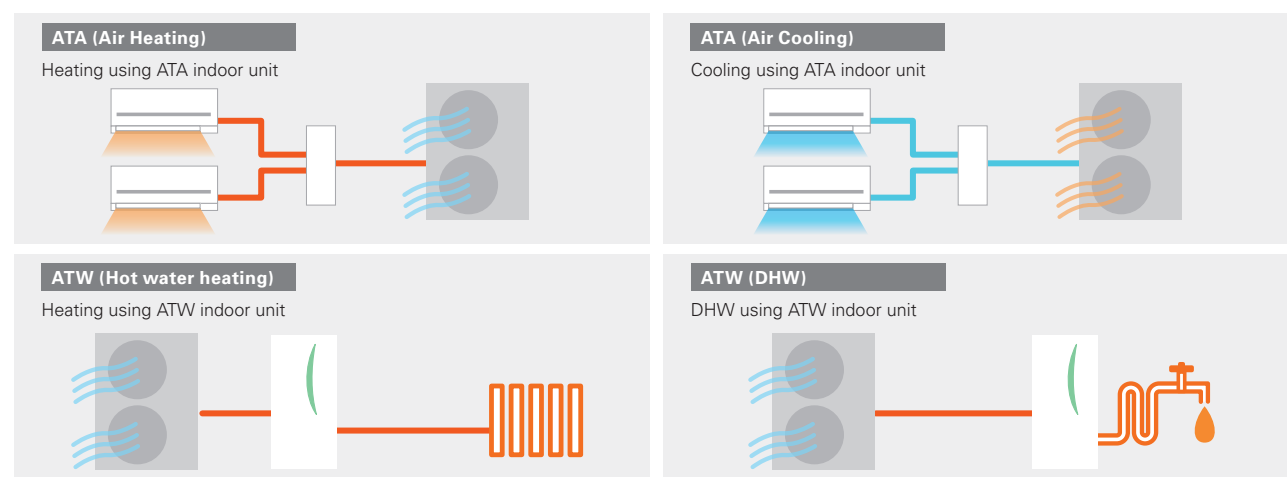

Optional Operation Patterns* (simultaneous)

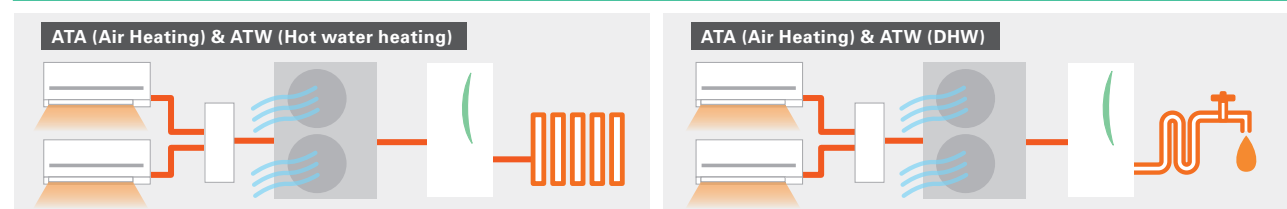


*When using optional simultaneous operation, there are some restrictions, such as connectable indoor units, operation range and DHW flow temp.

Usage Pattern All-in-one System Solution


Summer 2-in-1 Operation

In summer ATA cooling and DHW are utilised. Keep your room comfortable with ATA cooling during high temperature daytime. Heat pump operates to heat up water stored in the DHW tank when ATA is not operated. The hot water can be utilised for shower and washing dishes during daytime.

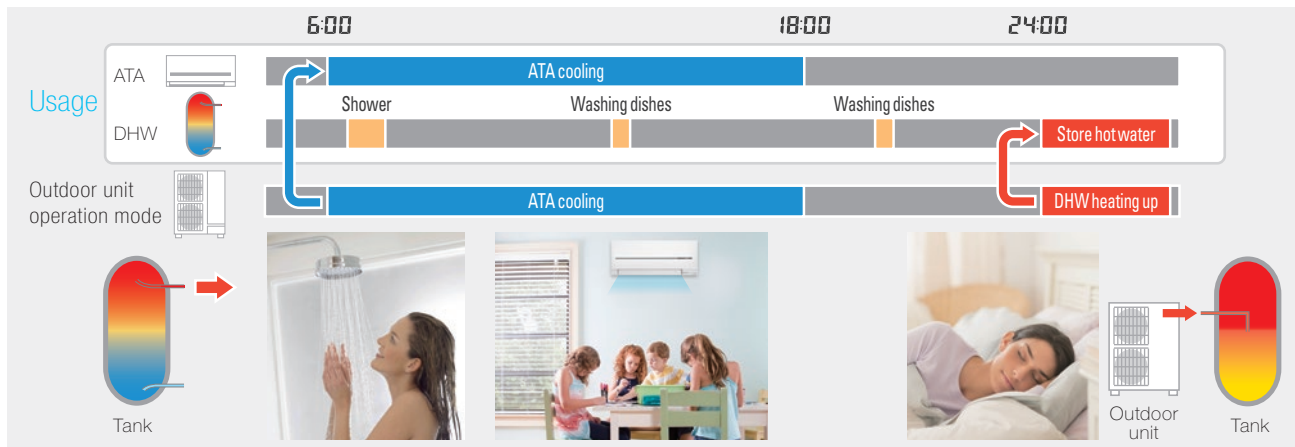

Spring & Autumn 2-in-1 Operation

In spring and autumn, ATA heating and DHW are utilised. ATA heating can warm up each room quickly during the low temperature morning and evening. Heat pump operates to heat up water stored in the DHW tank when ATA is not operated. The hot water can be utilised for shower and washing dishes during daytime.

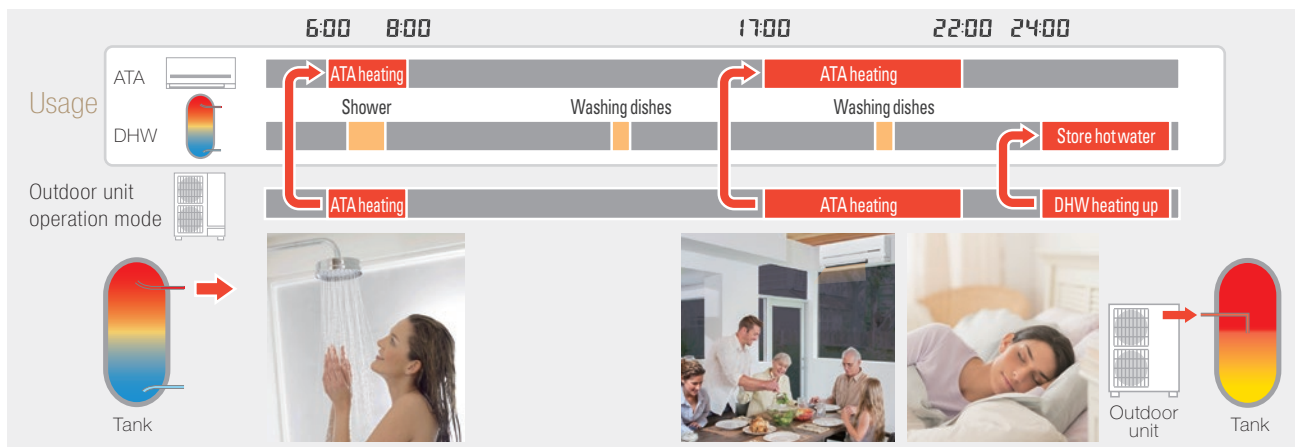

Winter ecodan

In winter ATW heating and DHW are utilised. ATW heating warms home all the day in severe cold weather. ATW heating stops temporarily only when the heat pump operates to heat up water stored in the DHW tank.



| Model name | | | | PUMY- P112VKM5(-BS) | PUMY- P125VKM5(-BS) | PUMY- P140VKM5(-BS) | PUMY- P112YKM(E)4(-BS) | PUMY- P125YKM(E)4(-BS) | PUMY- P140YKM(E)4(-BS) | |
|---------------------------------|---|--|-----------------------------------|--|------------------------|------------------------|--------------------------------|---------------------------|---------------------------|---------------|
| Power supply | | | | 1-phase 220 - 230 - 240V, 50Hz | | | 3-phase 380 - 400 - 415V, 50Hz | | | |
| Air-to-Air (ATA) | Cooling (nominal)*1 | Capacity | kW | 12.5 | 14.0 | 15.5 | 12.5 | 14.0 | 15.5 | |
| | | Power input | kW | 2.79 | 3.46 | 4.52 | 2.79 | 3.46 | 4.52 | |
| | | EER | | 4.48 | 4.05 | 3.43 | 4.48 | 4.05 | 3.43 | |
| | Temp. range of cooling | Indoor temp. | W.B. | 15 - 24°C | | | | | | |
| | | Outdoor temp.*2 | D.B. | -5 - 52°C | | | | | | |
| | Heating (nominal)*1 | Capacity | kW | 14.0 | 16.0 | 18.0 | 14.0 | 16.0 | 18.0 | |
| | | Power input | kW | 3.04 | 3.74 | 4.47 | 3.04 | 3.74 | 4.47 | |
| | | COP | | 4.61 | 4.28 | 4.03 | 4.61 | 4.28 | 4.03 | |
| | Temp. range of heating | Indoor temp. | W.B. | 15 - 27°C | | | | | | |
| | | Outdoor temp. | D.B. | -20 - 15°C | | | | | | |
| Air-to-Water (ATW) | Nominal flow rate (for heating) | | L/min | 35.8 | | | | | | |
| | Heating*3 | A7W35 | Capacity | kW | 12.5 | | | | | |
| | | | Power input | kW | 3.06 | | | | | |
| | | | COP | | 4.08 | | | | | |
| | | A2W35 | Capacity | kW | 10.0 | | | | | |
| | | | Power input | kW | 3.50 | | | | | |
| | | | COP | | 2.86 | | | | | |
| | Guaranteed operating range | ATW | Heating | D.B. | -20 - +21°C | | | | | |
| | | | DHW | D.B. | -20 - +35°C | | | | | |
| | | ATA + ATW | ATA heating + DHW | D.B. | 7 - +21°C | | | | | |
| | | | ATA heating + ATW heating *4 | D.B. | -10 - +21°C | | | | | |
| | Maximum Outlet water temp. | | | °C | 55 | | | | | |
| Outdoor unit | Indoor unit connectable | ATA only | Total capacity | 50 to 130% of outdoor unit capacity | | | | | | |
| | | | Model/ Quantity | Branch box system | 15-100/8 | 15-100/8 | 15-100/8 | 15-100/8 | 15-100/8 | 15-100/8 |
| | | | Mixed system*12 | 15-140*5/10 | 15-140*5/10*6 | 15-140*5/10*6 | 15-140*5/10 | 15-140*5/10*6 | 15-140*5/10*6 | |
| | | ATA + ATW individual operation | Total capacity | ATA : Max 130% of outdoor unit capacity + ATW (EHST20C or EHSC) *7 | | | | | | |
| | | | Model/Quantity (including ATW) | Branch box system | 15-100/8 | 15-100/8 | 15-100/8 | 15-100/8 | 15-100/8 | 15-100/8 |
| | | | Mixed system*12 | 15-140*5/10 | 15-140*5/10*6 | 15-140*5/10*6 | 15-140*5/10 | 15-140*5/10*6 | 15-140*5/10*6 | |
| | | ATA + ATW simultaneous operation | Total capacity | Max 100% of outdoor unit capacity : ATA + ATW (EHST20C or EHSC) *7 | | | | | | |
| | | | Model/Quantity | ATA*12 | 15/1*8 | 15-25/2*9 | 15-42*11/3*10 | 15/1*8 | 15-25/2*9 | 15-42*11/3*10 |
| | | | ATW | ATW (EHST20C or EHSC) / 1 | | | | | | |
| | | Sound pressure level (measured in anechoic room) | | | dB<A> | 49 / 51 | 50 / 52 | 51 / 53 | 49 / 51 | 50 / 52 |
| | Sound power level (measured in anechoic room) | | | dB<A> | 69 / 71 | 70 / 72 | 71 / 73 | 69 / 71 | 70 / 72 | 71 / 73 |
| | Refrigerant piping diameter | | | Liquid pipe | mm | | | | | |
| | | | | Gas pipe | mm | | | | | |
| | Fan | Type × Quantity | 9.52 flare | | | | | | | |
| | | | 15.88 flare | | | | | | | |
| | | | Propeller fan × 2 | | | | | | | |
| | | | 110 | | | | | | | |
| | | Compressor | Airflow rate | 1,883 | | | | | | |
| | 3,884 | | | | | | | | | |
| | 0.074 ± 0.074 | | | | | | | | | |
| | kW | | | | | | | | | |
| | Type × Quantity | | Scroll hermetic compressor × 1 | | | | | | | |
| | | Starting method | Inverter | | | | | | | |
| Motor output | | | kW | 2.9 | 3.5 | 3.9 | 2.9 | 3.5 | 3.9 | |
| External dimensions (H × W × D) | | | mm | 1,338 × 1,050 × 330 (+40) | | | | | | |
| Weight | | | kg | 122 | | | YKM: 125 / YKMF: 136 | | | |

*1

| | Indoor | Outdoor | Piping length | Level difference |
|---------|-------------------|-----------------|---------------|------------------|
| Cooling | 27°C DB / 19°C WB | 35°C DB | 7.5m | 0m |
| Heating | 20°C DB | 7°C DB / 6°C WB | 7.5m | 0m |

*2 10 to 52°C D.B.: When connecting PKFY-P15/20/25VBM, PFFY-P20/25/32VKM, PFFY-P20/25/32VLE(R)M, PEFY-P*VMA3 or M, S and P series indoor unit.

*3 In the case of ATW single connection. Input to circulation pump is not included.

*4 In the case of simultaneous operation of ATA heating and ATW heating, target flow temperature range is restricted to 45-55°C and when the ambient temp is under 7°C, the flow temp is lowered.

*5 Up to P100 when connecting via branch box.

*6 Up to 11 units when connecting via 2 branch boxes.

*7 Only one ecodan unit can be connected.

*8 Exceptionally, one MSZ-SF15VA or MSZ-AP15VF can be connected.

*9 Exceptionally, two MSZ-SF15VA or MSZ-AP15VF can be connected.

*10 Exceptionally, three MSZ-SF15VA or MSZ-AP15VF can be connected.


*11 In the case of City Multi connection, maximum is P32.

*12 PKFY and PFFY series are not connectable.

Piping specifications

| | | | |
|---|---|---------|----------------|
| Total piping length | m | 150* | a+b+c+d+e+f |
| Farthest piping length | m | 80 | a+b+d or a+c+e |
| | | 85 | a+f |
| Total piping length between outdoor unit and branch box | m | 55 | a+b+c |
| Total piping length between branch boxes and indoor units | m | 95 | d+e |
| Farthest piping length from the first joint | m | 30 | b or c or f |
| Farthest piping length after branch box | m | 25 | d or e |
| Height difference (Outdoor upside / Outdoor downside) | m | 50 / 40 | |

*When an ecodan is connected, the maximum piping length is 150m.

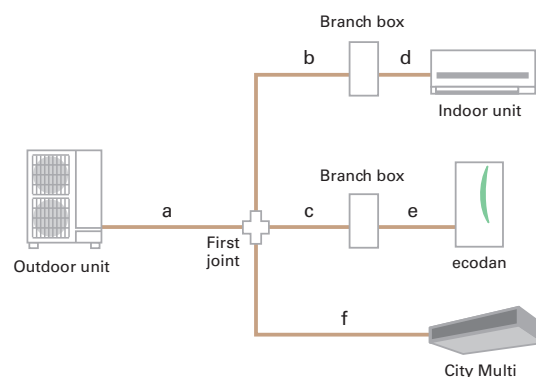

PUMY+ ecodan Compatibility Table

ATW branch box connection compatibility table

| Series | Type | Model name | Compatibility | Type | Model name | Compatibility | Type | Model name | Compatibility |
|--------|---------------|----------------|---------------|-----------|-------------|---------------|------------|------------|---------------|
| ATW | Cylinder unit | EHST20C-VM2/6D | ● | Hydro box | EHSC-VM2/6D | ● | Branch box | PAC-MK53BC | ● |
| | | EHST20C-YM9D | ● | | EHSC-YM9D | ● | | PAC-MK33BC | ● |

Connectable indoor unit capacity

For individual operation ATA+ATW (no simultaneous operation) ATA: Max 130% of outdoor unit capacity + ATW (EHST20C or EHSC)

| | | |
|--|---|--|
| Outdoor capacity 12.5kW | | |
| ATW indoor unit (Cylinder or Hydro box) 11.2kW | Connectable ATA indoor unit total capacity: Max.16.2kW (130%) | |
| Outdoor capacity 14.0kW | | |
| ATW indoor unit (Cylinder or Hydro box) 11.2kW | Connectable ATA indoor unit total capacity: Max.18.2kW (130%) | |
| Outdoor capacity 15.5kW | | |
| ATW indoor unit (Cylinder or Hydro box) 11.2kW | Connectable ATA indoor unit total capacity: Max.20.2kW (130%) | |

For simultaneous operation of ATA+ATW Max 100% of outdoor unit capacity: ATA + ATW (EHST20C or EHSC)

| | | | |
|--|-------------------------|---|--|
| Outdoor capacity 12.5kW | | | |
| ATW indoor unit (Cylinder or Hydro box) 11.2kW | ATA capacity Max. 1.3kW | *Exceptionally, one MSZ-SF15VA or MSZ-AP15VF can be connected. | |
| Outdoor capacity 14.0kW | | | |
| ATW indoor unit (Cylinder or Hydro box) 11.2kW | ATA capacity Max. 2.8kW | *Exceptionally, two units of MSZ-SF15VA or MSZ-AP15VF can be connected. | |
| Outdoor capacity 15.5kW | | | |
| ATW indoor unit (Cylinder or Hydro box) 11.2kW | ATA capacity Max. 4.3kW | *Exceptionally, three units of MSZ-SF15VA or MSZ-AP15VF can be connected. | |