









# LROSSNAY SYSTEM



## LOSSNAY LINEUP

Application		Model	Airflow	50	100	150	250	350	500	650	800	1000	1500	2000	2500		
				CMH	CMH	CMH	CMH	CMH	CMH	CMH	CMH	CMH	CMH	CMH	CMH		
Centralized Ventilation	Ceiling Concealed	LGH-RVX Series				●	●	●	●	●	●	●	●	●			
		LGH-RVXT Series											●	●	●		
		GUF Series								●			●				
		GUG Series (Dx-coil unit for Lossnay LGH-RVX/RVXT Series)								●	●	●	●	●	●	●	
		VL-220CZGV-E					●										
	Vertical Type	VL-CZPVU Series					●	●									
Decentralized Ventilation	Wall Mounted Type	VL-100(E)U <sub>5</sub> -E			●												
		VL-50(E)S <sub>2</sub> -E VL-50SR <sub>2</sub> -E		●													

### LGH-RVX Series

A commercially oriented system that can be used to deliver high performance and functions virtually anywhere.

### LGH-RVXT Series

Thin, large airflow models of the LGH series that deliver high performance and functions.

### GUF Series

Heat recovery units with a heating and cooling system that uses the City Multi outdoor unit as a heat source.

### Dx-coil unit (GUG Series)

Temperature control equipment that works with Lossnay units and Mr. Slim outdoor units.

### VL-CZPVU Series

Vertical type for residential use centralized ventilation with sensible heat exchange.

### VL-220CZGV-E


Centralized ventilation with sensible heat exchange, for residential use.

### VL-100(E)U<sub>5</sub>-E, VL-50(E)S<sub>2</sub>-E, VL-50SR<sub>2</sub>-E


Wall-mounted models. Particularly suitable for houses and small offices.

## REMOTE CONTROLLER

PZ-61DR-E



PZ-43SMF-E



Function (Communicating mode)	PZ-61DR-E		PZ-43SMF-E	
	LGH-RVX/RVXT	VL-220CZGV-E	LGH-RVX/RVXT	VL-220CZGV-E
Fan speed selection	4 fan speeds	4 fan speeds	2 of 4 fan speeds	2 of 4 fan speeds
Ventilation mode selection	Energy recovery / Bypass / Auto	Heat recovery / Bypass / Auto (available with optional part P-133DUE-E)	Energy recovery / Bypass / Auto	Heat recovery / Bypass / Auto (available with optional part P-133DUE-E)
Night-purge setting (time and fan speed)	Yes	No	No	No
Function setting from RC	Yes	Yes	No	No
Bypass temp. free setting	Yes	Yes (available with optional part P-133DUE-E)	No	No
Heater-On temp. free setting	Yes	No	No	No
Fan power change after installation	Yes	Yes	No	No
ON/OFF timer	Yes	Yes	Yes	Yes
Auto-Off timer	Yes	Yes	No	No
Weekly timer	Yes	Yes	No	No
Operation restrictions (ON/OFF, ventilation mode, fan speed)	Yes	Yes (ventilation mode is available with optional part P-133DUE-E)	No	No
Operation restrictions (fan speed skip setting)	Yes	Yes	No	No
Screen contrast adjustment	Yes	Yes	No	No
Language selection	Yes (8 languages)	Yes (8 languages)	No (English only)	No (English only)
Initializing	Yes	Yes	No	No
Filter cleaning sign	Yes	Yes	Yes	Yes
Lossnay core cleaning sign	Yes	No	No	No
Error indication	Yes	Yes	Yes	Yes
Error history	Yes	Yes	No	No

# LOSSNAY



Lossnay ventilation systems are renowned industry-wide for their efficiency. They offer environment-friendly energy recovery and humidity control, and enable air conditioning systems to simultaneously provide optimum room comfort and energy savings.



## Indoor Air Quality Inside a Building is Optimized Through Temperature and Humidity Exchange by Lossnay

Lossnay is a total heat exchange ventilation system that uses paper characteristics to perform temperature (sensible heat) and humidity (latent heat) exchange.

### ● The concept of sensible heat and latent heat exchange using Lossnay core

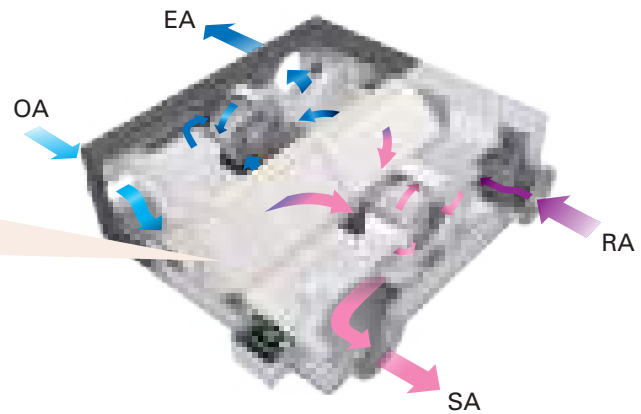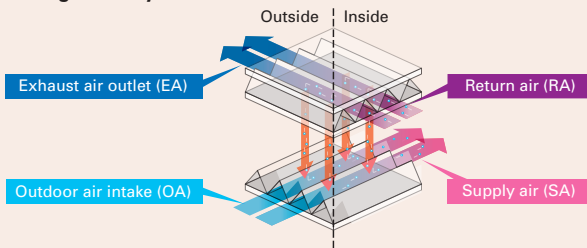


## What Can Be Improved by Introducing Lossnay?

### ● Ventilation with maximized comfort

#### In summer

Air similar to the conditions of cooled (dehumidified) indoor air is supplied.

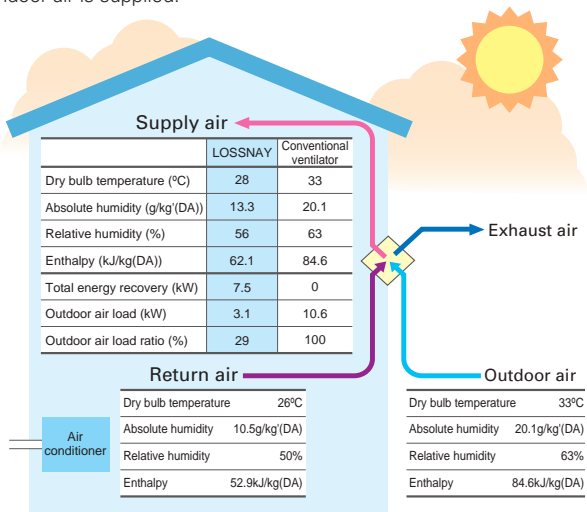

#### Heat recovery calculation


$$\text{Indoor supply-air temperature (°C)} = \left\{ \begin{array}{l} \text{Outdoor} \\ \text{temperature (°C)} \end{array} - \left\{ \begin{array}{l} \text{Outdoor} \\ \text{temperature (°C)} - \text{Indoor} \\ \text{temperature (°C)} \end{array} \right\} \times \text{Temp recovery} \right. \\ \left. \text{efficiency (\%)} \right\} + \text{Outdoor temperature (°C)}$$

Calculation example: 28°C = 33°C - (33°C - 26°C) × 71.5%

\*The above applies to the case of LGH-100RVX (fan speed 4).

#### In winter

Air similar to the conditions of heated (humidified) indoor air is supplied.

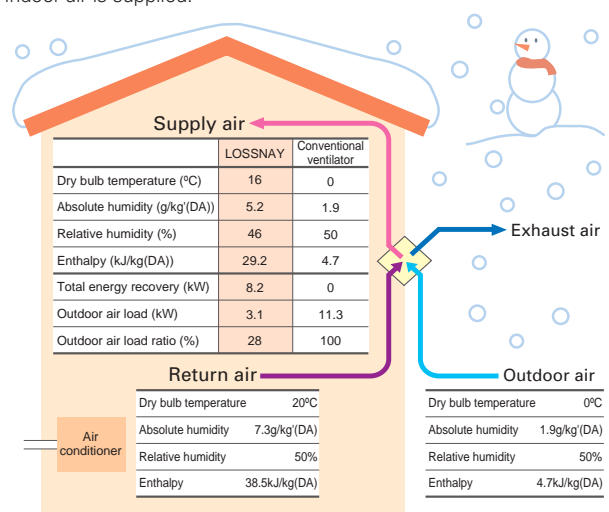

#### Heat recovery calculation

$$\text{Indoor supply-air temperature (°C)} = \left\{ \begin{array}{l} \text{Indoor} \\ \text{temperature (°C)} \end{array} - \left\{ \begin{array}{l} \text{Outdoor} \\ \text{temperature (°C)} \end{array} \right\} \times \text{Temp recovery} \right. \\ \left. \text{efficiency (\%)} + \text{Outdoor temperature (°C)} \right\}$$

Calculation example: 16°C = (20°C - 0°C) × 80% + 0°C

\*The above applies to the case of LGH-100RVX (fan speed 4).


# Commercial Use Lossnay

## LGH-RVX Series (Standard model)

### Power consumption reduced further with the introduction of a DC motor

Low power consumption is realised with the introduction of a high efficiency brushless DC motor. Compared to models with an AC motor, power consumption is reduced.

Comparison between current and previous power consumption  
(Current model: Fan speed 4 at 230V 50Hz, Previous model: Extra-High at 220V 50Hz)

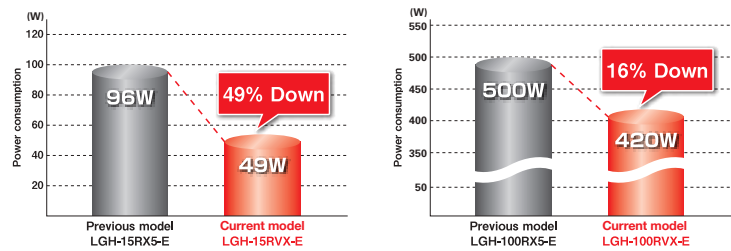

### Improved airflow range

#### Wide airflow range


Each fan speed has a range setting of 25, 50, 75 and 100%, allowing much finer airflow control. When used in combination with the CO<sub>2</sub> sensor or timer function, airflow can be controlled according to conditions that realize better performance and reduce power consumption.

#### Fan speed adjustment function


The default fan speed value can be adjusted slightly. Use the PZ-61DR-E remote controller to reset the speed.

- 1) Considering the total hours of Lossnay operation (filter clogging), fan power can be adjusted automatically after a given period of time.
- 2) After the unit is installed, fine adjustments can be made if the airflow is slightly lower than the desired airflow.

■ Characteristic curves of the LGH-RVX/RVXT Series

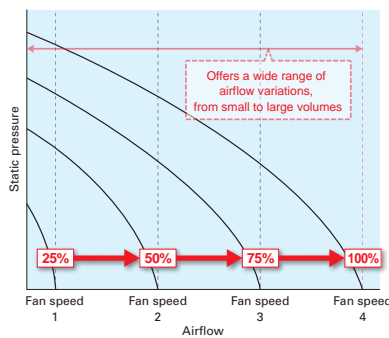

■ P-Q curve image

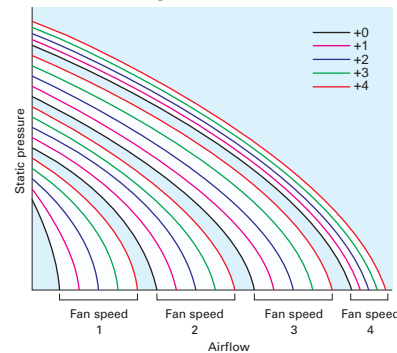

## LGH-RVXT Series (Thin body type)

The LGH-RVXT series has a large airflow of 1500 - 2500 CMH but a thin body of approximately 500mm. Therefore, installing the unit in the ceiling is easy.

■ LGH-150/200RVX-E



Height: 808mm


■ LGH-150/200/250RVXT-E



Height: 500mm


38% Thinner body

■ LGH-RVXT installation image

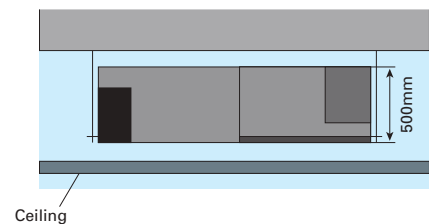

## GUF Series (Lossnay with Dx-coil unit)

Along with Lossnay ventilation, the OA processing unit is really two units in one, functioning as the main air conditioner when the load is light and adding supplemental air conditioning when the load is heavy.

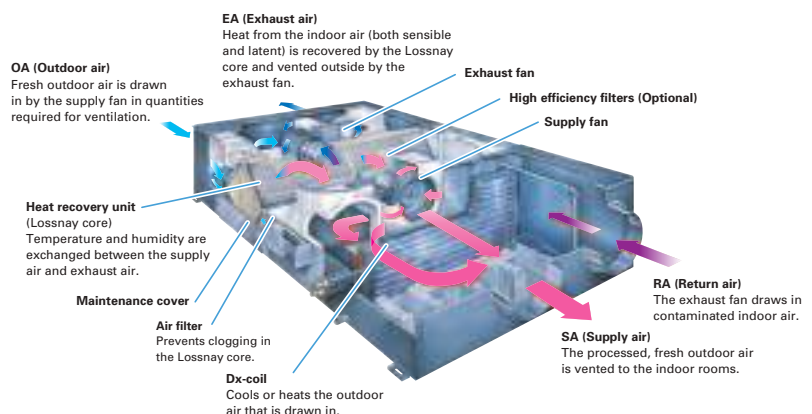


# Commercial Use Lossnay Specifications

## RVX Series


### LGH-15RVX-E

Electrical power supply	220-240V/50Hz, 220V/60Hz							
	Heat recovery mode				Bypass mode			
Ventilation mode	SP4				SP3			
Fan speed	SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1
Running current (A)	0.40	0.24	0.15	0.10	0.41	0.25	0.15	0.10
Input power (W)	49	28	14	7	52	28	14	8
Airflow	(m <sup>3</sup> /h)		(L/s)		(m <sup>3</sup> /h)		(L/s)	
External static pressure (Pa)	150	113	75	38	150	113	75	38
Temperature exchange efficiency (%)	42	31	21	10	42	31	21	10
Enthalpy exchange efficiency (%)	95	54	24	6	95	54	24	6
Enthalpy exchange efficiency (%)	Heating		80		81		83	
	Cooling		73		74.5		78	
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)	71	74.5	78	79	-	-	-	-
Weight (kg)	28	24	19	17	29	24	19	18
Specific energy consumption class	A							

### Characteristic Curves

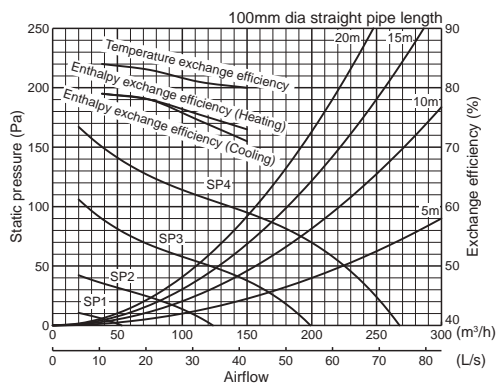


### Dimensions

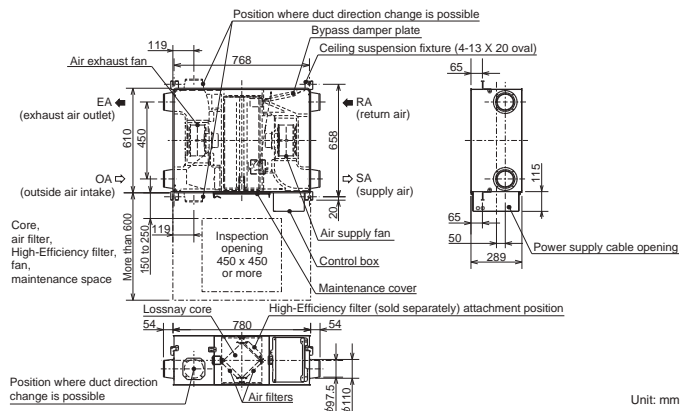


### LGH-25RVX-E

Electrical power supply	220-240V/50Hz, 220V/60Hz							
	Heat recovery mode				Bypass mode			
Ventilation mode	SP4				SP3			
Fan speed	SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1
Running current (A)	0.48	0.28	0.16	0.10	0.48	0.29	0.16	0.11
Input power (W)	62	33	16	7.5	63	35	17	9
Airflow	(m <sup>3</sup> /h)		(L/s)		(m <sup>3</sup> /h)		(L/s)	
External static pressure (Pa)	250	188	125	63	250	188	125	63
Temperature exchange efficiency (%)	69	52	35	17	69	52	35	17
Enthalpy exchange efficiency (%)	85	48	21	5	85	48	21	5
Enthalpy exchange efficiency (%)	Heating		79		80		82	
	Cooling		69.5		72		76	
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)	68	70	74.5	83	-	-	-	-
Weight (kg)	27	22	20	17	27.5	23	20	17
Specific energy consumption class	A							

### Characteristic Curves

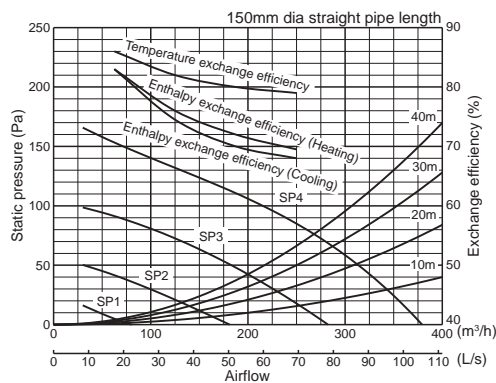

### Dimensions

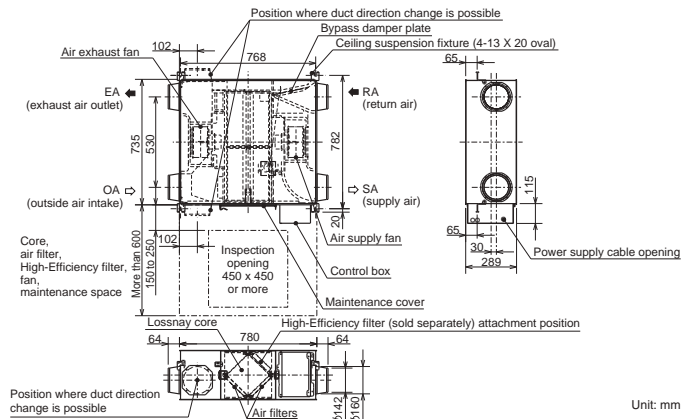

■ For LGH-RVX and LGH-RVXT series

\* The running current, the input power, the efficiency and the noise are based on the rated airflow, 230V/50Hz, and 220V/60Hz.


\* Figures in the chart is measured according to Japan Industrial Standard (JIS B 8628). Characteristic Curves are measured by chamber method.

\* For specifications at other frequencies, contact your dealer.


## LGH-35RVX-E

Electrical power supply		220-240V/50Hz, 220V/60Hz								
		Heat recovery mode				Bypass mode				
Ventilation mode										
Fan speed										
Running current (A)		SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1	
Input power (W)		0.98	0.54	0.26	0.12	0.98	0.56	0.28	0.13	
Airflow		(m <sup>3</sup> /h)	140	70	31	11	145	72	35	13
		(L/s)	350	263	175	88	350	263	175	88
External static pressure (Pa)		97	73	49	24	97	73	49	24	
Temperature exchange efficiency (%)		160	90	40	10	160	90	40	10	
Enthalpy exchange efficiency (%)		80	82.5	86	88.5	-	-	-	-	
Enthalpy exchange efficiency (%)		Heating	71.5	74	78.5	83.5	-	-	-	
		Cooling	71	73	78	82	-	-	-	
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)		32	28	20	17	32.5	28	20	18	
Weight (kg)		30								

## Characteristic Curves

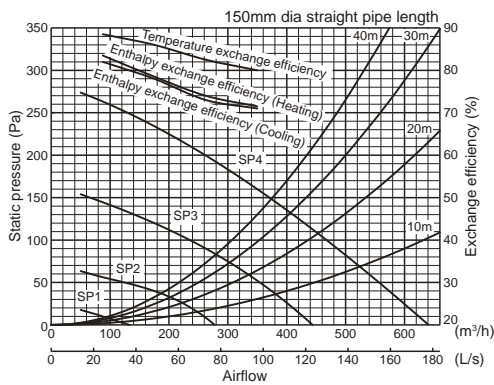


## Dimensions

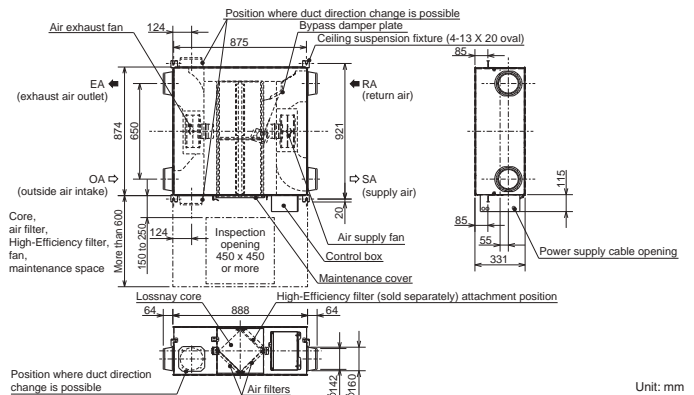


## LGH-50RVX-E

Electrical power supply		220-240V/50Hz, 220V/60Hz								
		Heat recovery mode				Bypass mode				
Ventilation mode										
Fan speed										
Running current (A)		SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1	
Input power (W)		1.15	0.59	0.26	0.13	1.15	0.59	0.27	0.13	
Airflow		(m <sup>3</sup> /h)	165	78	32	12	173	81	35	14
		(L/s)	500	375	250	125	500	375	250	125
External static pressure (Pa)		139	104	69	35	139	104	69	35	
Temperature exchange efficiency (%)		120	68	30	8	120	68	30	8	
Enthalpy exchange efficiency (%)		78	81	83.5	87	-	-	-	-	
Enthalpy exchange efficiency (%)		Heating	69	71	75	82.5	-	-	-	
		Cooling	66.5	68	72.5	82	-	-	-	
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)		34	28	19	18	35	29	20	18	
Weight (kg)		33								

## Characteristic Curves

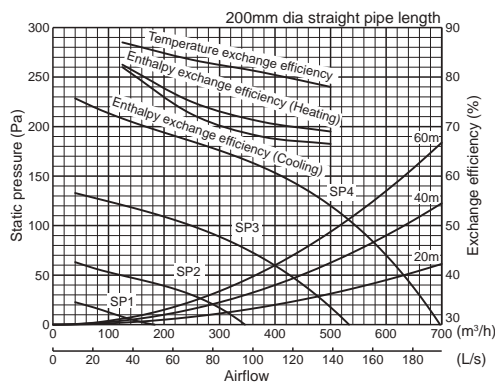

## Dimensions

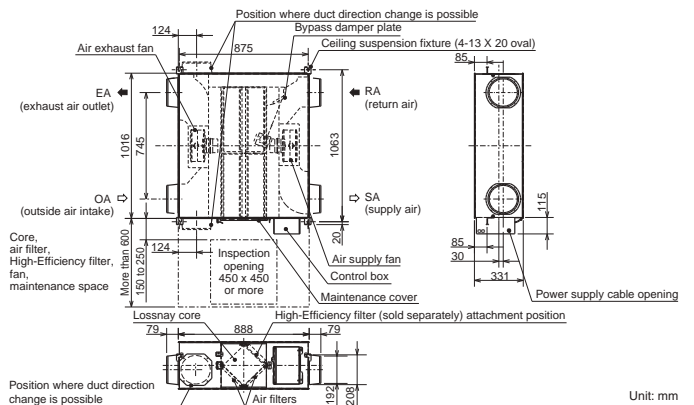

■ For LGH-RVX and LGH-RVXT series

\* The running current, the input power, the efficiency and the noise are based on the rated airflow, 230V/50Hz, and 220V/60Hz.

\* Figures in the chart is measured according to Japan Industrial Standard (JIS B 8628). Characteristic Curves are measured by chamber method.

\* For specifications at other frequencies, contact your dealer.




# Commercial Use Lossnay Specifications


## LGH-65RVX-E

Electrical power supply	220-240V/50Hz, 220V/60Hz								
Ventilation mode	Heat recovery mode				Bypass mode				
Fan speed	SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1	
Running current (A)	1.65	0.90	0.39	0.15	1.72	0.86	0.38	0.16	
Input power (W)	252	131	49	15	262	131	47	17	
Airflow	(m <sup>3</sup> /h)	650	488	325	163	650	488	325	163
	(L/s)	181	135	90	45	181	135	90	45
External static pressure (Pa)	120	68	30	8	120	68	30	8	
Temperature exchange efficiency (%)	77	81	84	86	-	-	-	-	
Enthalpy exchange efficiency (%)	Heating	68.5	71	76	82	-	-	-	
	Cooling	66	69.5	74	81	-	-	-	
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)	34.5	29	22	18	35.5	29	22	18	
Weight (kg)	38								

### Characteristic Curves

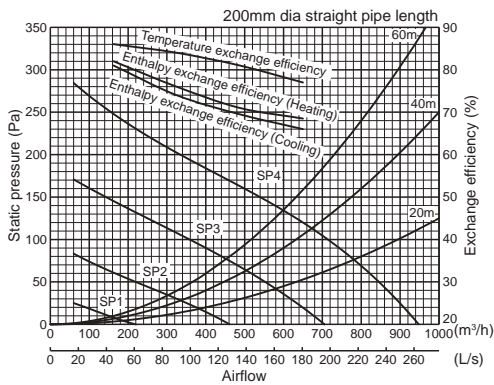


### Dimensions

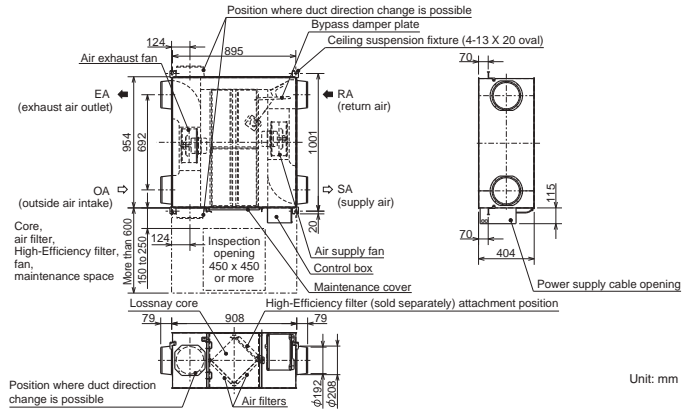


## LGH-80RVX-E

Electrical power supply	220-240V/50Hz, 220V/60Hz								
Ventilation mode	Heat recovery mode				Bypass mode				
Fan speed	SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1	
Running current (A)	1.82	0.83	0.36	0.15	1.97	0.86	0.40	0.15	
Input power (W)	335	151	60	18	347	151	64	20	
Airflow	(m <sup>3</sup> /h)	800	600	400	200	800	600	400	200
	(L/s)	222	167	111	56	222	167	111	56
External static pressure (Pa)	150	85	38	10	150	85	38	10	
Temperature exchange efficiency (%)	79	82.5	84	85	-	-	-	-	
Enthalpy exchange efficiency (%)	Heating	71	73.5	78	81	-	-	-	
	Cooling	70	72.5	78	81	-	-	-	
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)	34.5	30	23	18	36	30	23	18	
Weight (kg)	48								

### Characteristic Curves

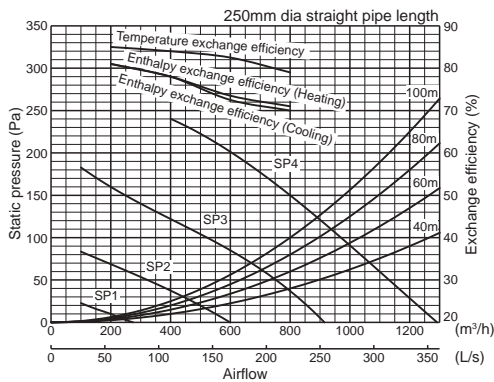

### Dimensions

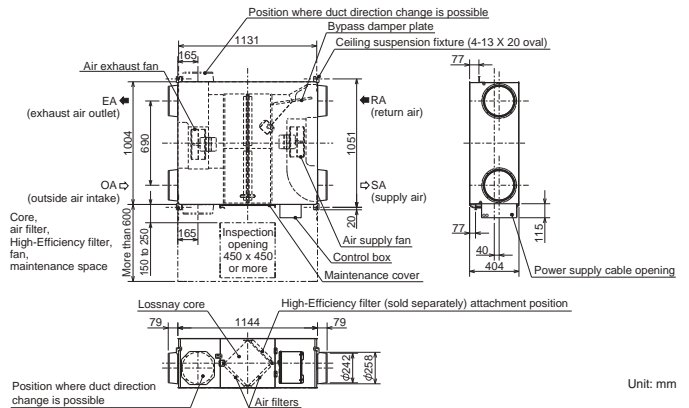

■ For LGH-RVX and LGH-RVXT series

\* The running current, the input power, the efficiency and the noise are based on the rated airflow, 230V/50Hz, and 220V/60Hz.


\* Figures in the chart is measured according to Japan Industrial Standard (JIS B 8628). Characteristic Curves are measured by chamber method.

\* For specifications at other frequencies, contact your dealer.


## LGH-100RVX-E

Electrical power supply		220-240V/50Hz, 220V/60Hz							
		Heat recovery mode				Bypass mode			
Ventilation mode									
Fan speed		SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1
Running current (A)		2.50	1.20	0.50	0.17	2.50	1.20	0.51	0.19
Input power (W)		420	200	75	21	420	200	75	23
Airflow	(m <sup>3</sup> /h)	1000	750	500	250	1000	750	500	250
	(L/s)	278	208	139	69	278	208	139	69
External static pressure (Pa)		170	96	43	11	170	96	43	11
Temperature exchange efficiency (%)		80	83	86.5	89.5	-	-	-	-
Enthalpy exchange efficiency (%)	Heating	72.5	74	78	87	-	-	-	-
	Cooling	71	73	77	85.5	-	-	-	-
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)		37	31	23	18	38	32	24	18
Weight (kg)		54							

## Characteristic Curves

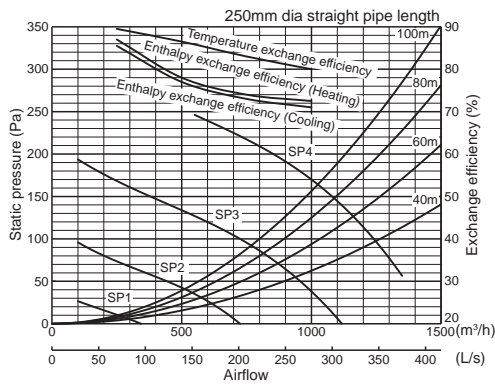


## Dimensions

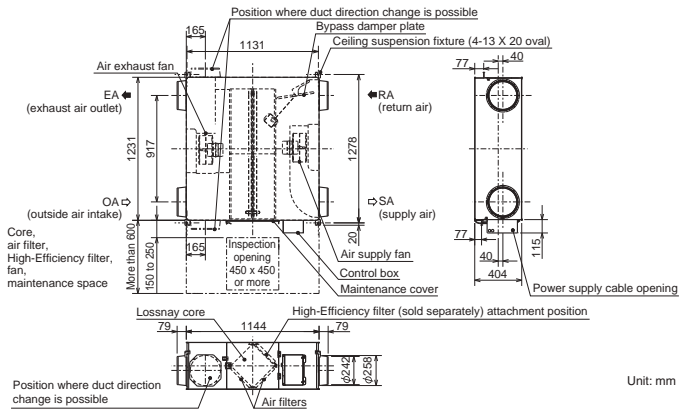


## LGH-150RVX-E

Electrical power supply		220-240V/50Hz, 220V/60Hz							
		Heat recovery mode				Bypass mode			
Ventilation mode									
Fan speed		SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1
Running current (A)		3.71	1.75	0.70	0.29	3.85	1.78	0.78	0.30
Input power (W)		670	311	123	38	698	311	124	44
Airflow	(m <sup>3</sup> /h)	1500	1125	750	375	1500	1125	750	375
	(L/s)	417	313	208	104	417	313	208	104
External static pressure (Pa)		175	98	44	11	175	98	44	11
Temperature exchange efficiency (%)		80	82.5	84	85	-	-	-	-
Enthalpy exchange efficiency (%)	Heating	72	73.5	78	81	-	-	-	-
	Cooling	70.5	72.5	78	81	-	-	-	-
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)		39	32	24	18	40.5	33	26	18
Weight (kg)		98							

## Characteristic Curves

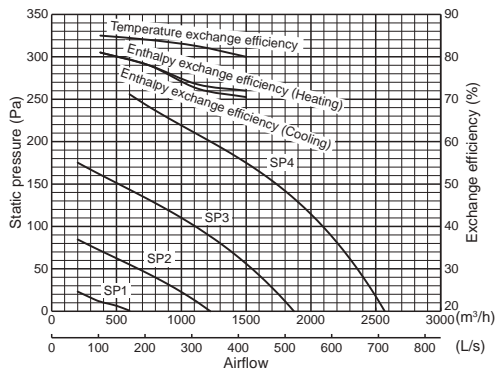

## Dimensions

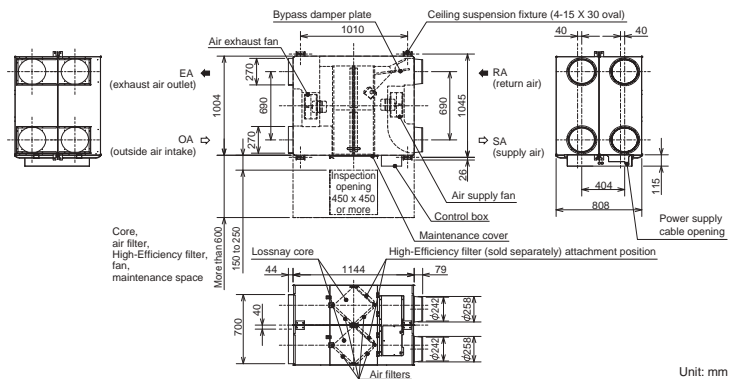

■ For LGH-RVX and LGH-RVXT series

\* The running current, the input power, the efficiency and the noise are based on the rated airflow, 230V/50Hz, and 220V/60Hz.

\* Figures in the chart is measured according to Japan Industrial Standard (JIS B 8628). Characteristic Curves are measured by chamber method.

\* For specifications at other frequencies, contact your dealer.




# Commercial Use Lossnay Specifications


## LGH-200RVX-E

Electrical power supply	220-240V/50Hz, 220V/60Hz								
Ventilation mode	Heat recovery mode				Bypass mode				
Fan speed	SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1	
Running current (A)	4.88	2.20	0.88	0.33	4.54	2.06	0.87	0.35	
Input power (W)	850	400	153	42	853	372	150	49	
Airflow	(m <sup>3</sup> /h)	2000	1500	1000	500	2000	1500	1000	500
	(L/s)	556	417	278	139	556	417	278	139
External static pressure (Pa)	150	84	38	10	150	84	38	10	
Temperature exchange efficiency (%)	80	83	86.5	89.5	-	-	-	-	
Enthalpy exchange efficiency (%)	Heating	72.5	74	78	87	-	-	-	
	Cooling	71	73	77	85.5	-	-	-	
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)	40	36	28	18	41	36	27	19	
Weight (kg)	110								

### Characteristic Curves

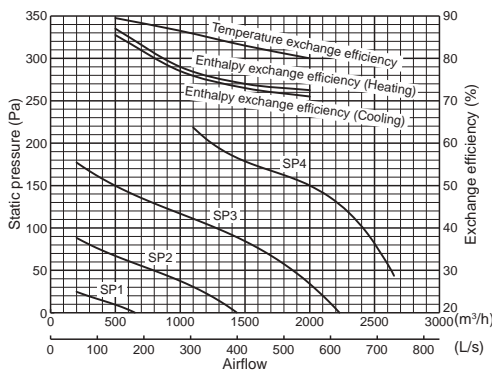

### Dimensions

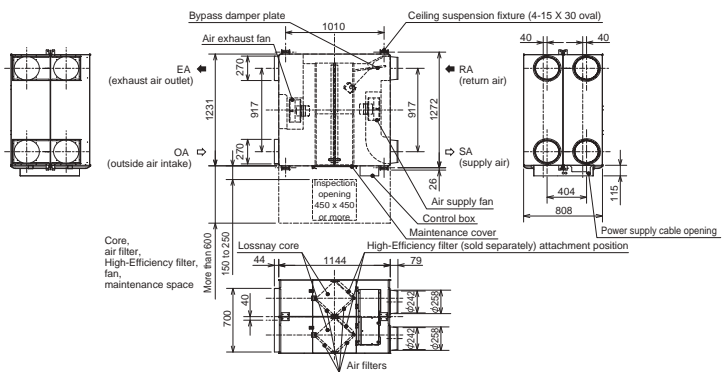


Unit: mm

## RVXT Series


### LGH-150RVXT-E

Electrical power supply	220-240V/50Hz, 220V/60Hz								
Ventilation mode	Heat recovery mode				Bypass mode				
Fan speed	SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1	
Running current (A)	4.30	2.40	1.10	0.36	3.40	1.80	0.77	0.31	
Input power (W)	792	421	176	48	625	334	134	37	
Airflow	(m <sup>3</sup> /h)	1500	1125	750	375	1500	1125	750	375
	(L/s)	417	313	208	104	417	313	208	104
External static pressure (Pa)	Supply	175	98	44	11	175	98	44	11
	Return	100	56	25	6	100	56	25	6
Temperature exchange efficiency (%)	80	80.5	81	81.5	-	-	-	-	
Enthalpy exchange efficiency (%)	Heating	70	71	73	75	-	-	-	
	Cooling	69	70	72	74	-	-	-	
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)	39.5	35.5	29.5	22	39	33	26.5	20.5	
Weight (kg)	156								

### Characteristic Curves

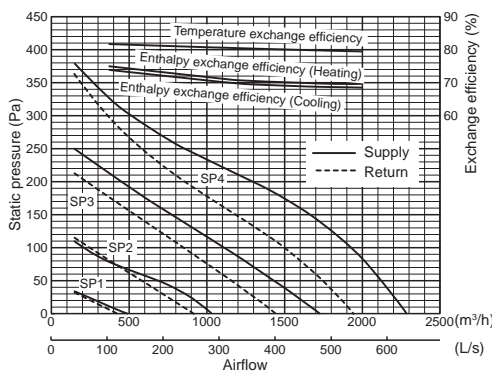

### Dimensions

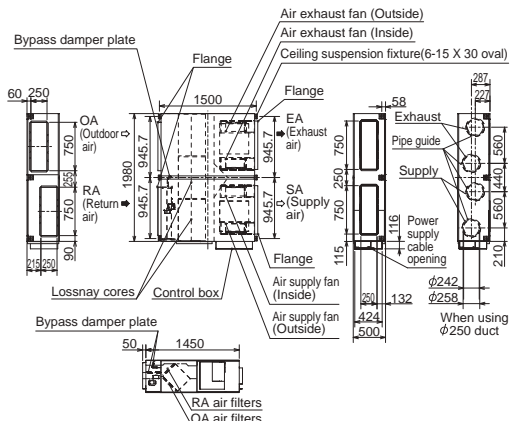

Unit: mm

■ For LGH-RVX and LGH-RVXT series

\* The running current, the input power, the efficiency and the noise are based on the rated airflow, 230V/50Hz, and 220V/60Hz.


\* Figures in the chart is measured according to Japan Industrial Standard (JIS B 8628). Characteristic Curves are measured by chamber method.

\* For specifications at other frequencies, contact your dealer.


## LGH-200RVXT-E

Electrical power supply	220-240V/50Hz, 220V/60Hz								
Ventilation mode	Heat recovery mode				Bypass mode				
Fan speed	SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1	
Running current (A)	5.40	2.70	1.10	0.39	5.00	2.20	0.85	0.34	
Input power (W)	1000	494	197	56	916	407	150	45	
Airflow	(m <sup>3</sup> /h)	2000	1500	1000	500	2000	1500	1000	500
	(L/s)	556	417	278	139	556	417	278	139
External static pressure (Pa)	Supply	175	98	44	11	175	98	44	11
	Return	100	56	25	6	100	56	25	6
Temperature exchange efficiency (%)	80	81	82.5	84	-	-	-	-	
Enthalpy exchange efficiency (%)	Heating	72.5	73.5	77	83	-	-	-	
	Cooling	70	71	74.5	80.5	-	-	-	
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)	39.5	35.5	28	22	40.5	34.5	27	20.5	
Weight (kg)	159								

## Characteristic Curves

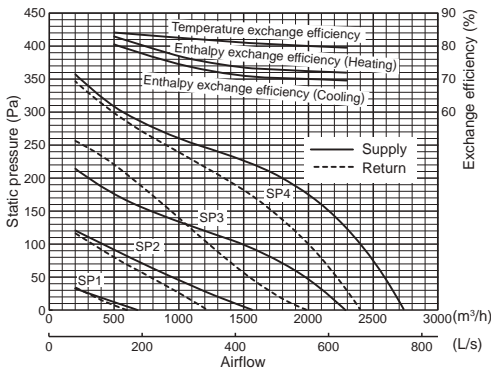

## Dimensions

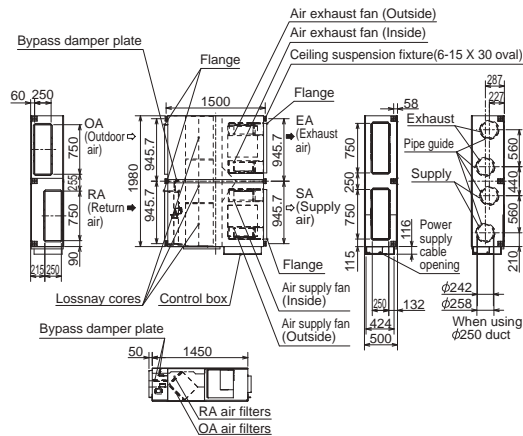


Unit: mm


## LGH-250RVXT-E

Electrical power supply	220-240V/50Hz, 220V/60Hz								
Ventilation mode	Heat recovery mode				Bypass mode				
Fan speed	SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1	
Running current (A)	7.60	3.60	1.40	0.57	6.90	3.10	1.30	0.49	
Input power (W)	1446	687	244	82	1298	587	212	69	
Airflow	(m <sup>3</sup> /h)	2500	1875	1250	625	2500	1875	1250	625
	(L/s)	694	521	347	174	694	521	347	174
External static pressure (Pa)	Supply	175	98	44	11	175	98	44	11
	Return	100	56	25	6	100	56	25	6
Temperature exchange efficiency (%)	77	79	80.5	82.5	-	-	-	-	
Enthalpy exchange efficiency (%)	Heating	68	71.5	74	79	-	-	-	
	Cooling	65.5	69	71.5	76.5	-	-	-	
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)	43	39	32	24	44	38.5	31	22.5	
Weight (kg)	198								

## Characteristic Curves

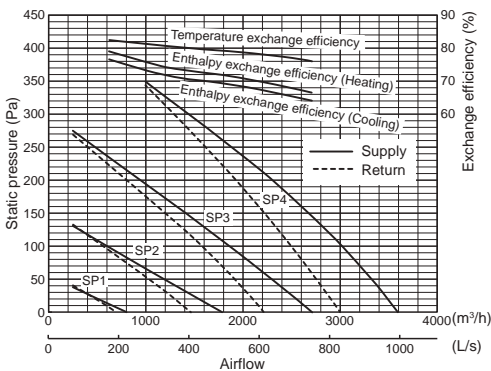

## Dimensions

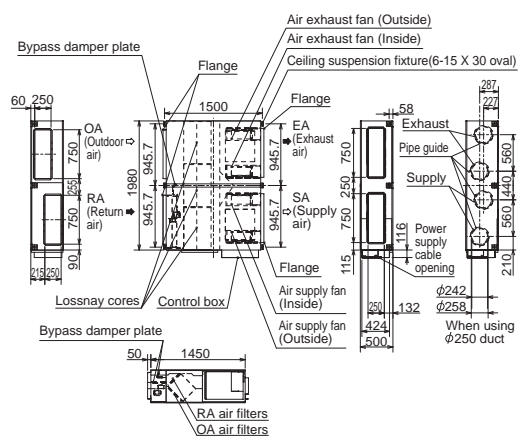

Unit: mm

■ For LGH-RVX and LGH-RVXT series

\* The running current, the input power, the efficiency and the noise are based on the rated airflow, 230V/50Hz, and 220V/60Hz.

\* Figures in the chart is measured according to Japan Industrial Standard (JIS B 8628). Characteristic Curves are measured by chamber method.

\* For specifications at other frequencies, contact your dealer.