

# PAR-SL100


WIRELESS REMOTE CONTROLLER FOR FOUR-WAY CASSETTE UNITS



## PAR-SL100 dedicated wireless controller

PAR-SL100 dedicated wireless controller for PLFY-P VFM-E1 and PLFY-P VEM-E four-way cassette units

- Backlight for comfortable usage even in poor lighting conditions.
- Direct/Indirect function control when used in combination with 3D i-see Sensor corner sensor.
- Individual swing louvre control.
- View and set setpoint temperatures in 0.5 °C steps.
- Dual Setpoint function

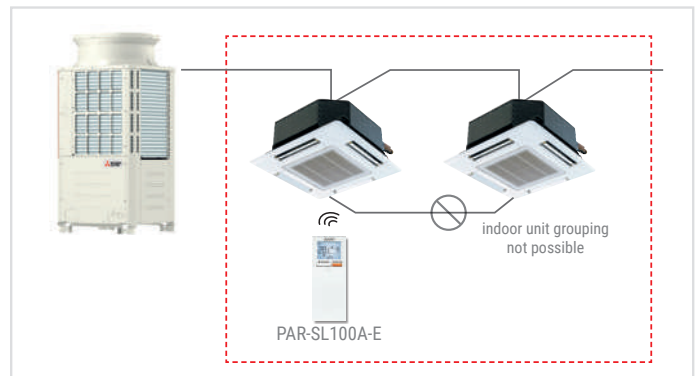

Compatibility		
	Receiver	Remote controller
PLFY-P*VEM-E	PAR-SE9FA-E Corner receiver	PAR-SL100A-E or PAR-FL32MA
PLFY-P*VFM-E1	SLP-2FAL (grille with receiver)	

## Key Technologies

--	--	--	--	--	--	--	--	--	--

Function	DESCRIPTION	SETTING	DISPLAY
ON/OFF	Switch between ON and OFF	○	○
Temperature setting	Modify set temperature. The settable temperature range varies depending on the model of indoor unit.	○	○
Air flow direction	Adjust air flow angle (4-Angle, Swing), Auto Louvre, ON/OFF Selectable air flow directions depend on the model of indoor unit.	○	○
Timer	Usable to set one ON and one OFF event per day.	○	○
Enable/disable local operations	The following functions may be disabled from specific settings on the centralised controller: ON/OFF, select operating mode, set temperature, fan speed, air flow direction, reset filter indicator lamp. *1A beeper sounds and an LED flashes as confirmation when an operation is disabled from the centralised controller.	×	○ <sup>1</sup>

○ Each group × Not available